


## Before You Buy, Check Backside Clearance

Our **Size Finder** lets you determine which size GoClaws you need to fit **your tire**. However, **you also need to determine if GoClaws will fit your vehicle**.

For GoClaws to fit without interference, your vehicle will need at least 7/8 inch (22 mm) clearance between the tire and the vehicle. The most common obstructions are...

- Strut towers
- Brake Lines
- Springs
- Inner wheelwell

Please check your vehicle by running the palm of your hand around the backside of the tire. If the back of your hand hits anything, you probably cannot use GoClaws.

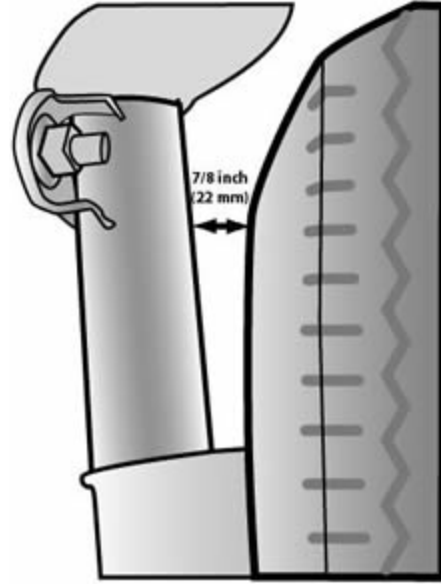

## GoClaws will NOT fit the following vehicles

This list is NOT complete. If clearance is insufficient for your vehicle, let us know.

Make	Model	Year	Reason
Acura	TL	2004-2005	Hits something
Audi	A4	1996-2005	Hits strut
Audi	A6	1995-2005	Hits strut
BMW	3 Series	1992-2004	Hits wheelwell
Chrysler	Town & Country	1996-2000	Hits strut
Chevrolet	Lumina APV	1990-1996	Hits strut
Dodge	Caravan	1996-2000	Hits strut
Dodge	Neon SRT-4	2003-2005	Hits strut
Kia	Optima	2005	Hits strut
Oldsmobile	Silhouette	1990-1996	Hits strut
Mazda	RX8	2004-2006	Hits strut
Pontiac	Trans Sport	1990-1996	Hits Strut
Plymouth	Voyager	1996-2000	Hits strut
Toyota	4-Runner (with tire pressure sensor)	2004-2005	Hits tire pressure sensor
Toyota	Camry	1997-2001	Hits strut
Toyota	Highlander (when mounted on the rear wheels)	2004-2005	Hits strut on rear wheels
Volkswagen	Golf GTI	1999-2004	Hits strut
Volkswagen	Passat	1998-2005	Hits strut

